


2~, 277V Track Accessories

Used on 244 series track w/ data

Color:-1: White, -2: Black, -3: Silver



554-2-1201: Live End Feed,earthright

554-2-1202: Live End Feed, earth left




554-0-1217: End Cap




554-2-1206: Straight Coupler w/ data. Used for splicing track sections, transferring power and data along spliced areas.

This information is subject to change without notice.

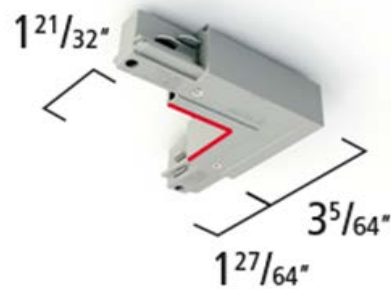

554-2-1209: L Coupler w/ feed option **outside**

554-2-1210:L Coupler w/feed option **inside**

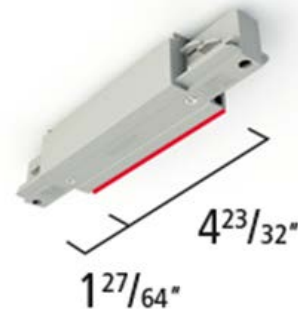

554-2-1208: "I" Coupler with feed position




554-2-1212: T Coupler w/ feed option **inside earth right**

554-2-1213: T Coupler w/ feed option **inside earth left**

554-2-1214: T Coupler w/ feed option **outside earth right**

554-2-1215: T Coupler w/ feed option **outside earth left**

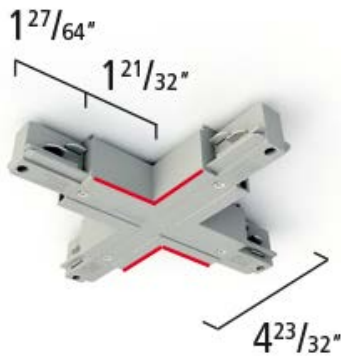

554-2-1216: X Coupler w/ feed option.

Specifications:

Material is fabricated of self-extinguishing polycarbonate to UL94 class VO. Low profile of unit is equal to the height profile of track series 244..

Accessories accepting power is concealed through the bottom. Live end feeds have 2 locations. (Exposed and concealed)

